

# DEPLOYABLE SHOCK RACK CASES

## STACKABLE, MOBILE, AND READY TO SHIP

A rugged MIL-STD 810 roto-molded shell ensures industry-leading strength and impact resistance, with molded in stacking ribs and lugs *designed to stack with competitive manufacturer's cases*. The standard COTS case comes with a 2" deep front and 5" deep rear lid, and edge casters for convenient transport. Available in 30", 24", and 20" rack depths.



### 3RR REMOVABLE SHOCK RACKS

Removable (slide out) Series inner rack system is designed to meet **ANSI/EIA-310-C** standards with a "positive lock" inner rack latch

5" deep rear lid with edge wheels standard;  
2" deep rear lid (optional)


Lid hangers

Pressure relief valve

Rugged roto-molded construction meets **MIL-STD 810**

Stainless steel non-reflective latches

2" deep front lid standard;  
5" deep front lid (optional)

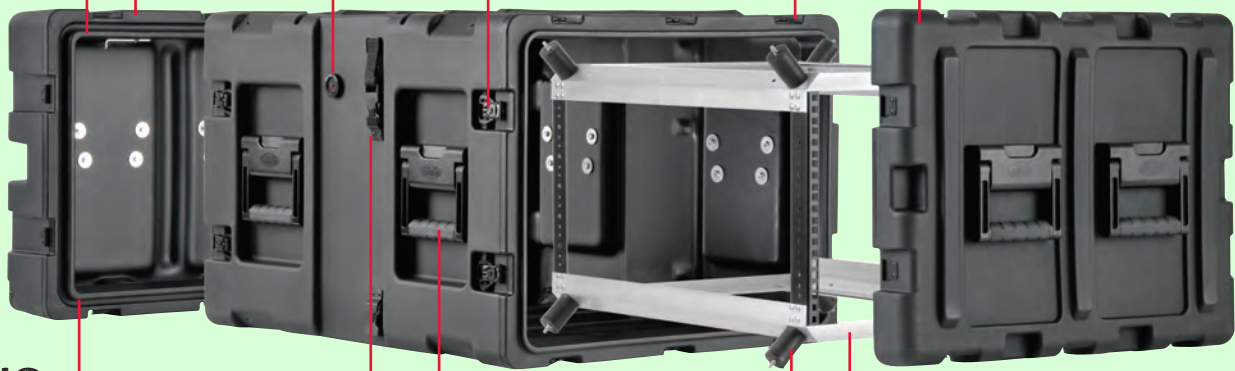

### 3RS STATIC SHOCK RACKS

Gasket sealed  
watertight construction

Coupling latches

Spring loaded cushion grip handles

Elastomeric shock and vibration isolators  
with a standard payload range of 40 to 150 lbs;  
Optional dual isolators increase range to 300 lbs

Inner rack meets **EIA-310** standards and  
comes with 10-32 mounting hardware;  
Available rack depths: 20", 24", 28" and 30"

### 3SKB ROTO SHOCK RACKS

When shock isolation is needed and overall value is a concern, this series provides a great option in 30", 28", and 24" rack depths. Roto-molded with threaded steel rails, this series features an aluminum interior H-shaped frame for maximum strength, removable casters, and a compound hinge system for fast deployment.



### 20" ROTO SHOCK RACKS

Roto-molded shock rack with threaded steel rails, aluminum interior H-shaped frame for maximum strength, adjustable elastomer shocks, and molded handles for a secure grasping point.



### 20" SHOCK ABSORBING ROLLING RACKS

Roto-molded 20" deep rack frame with pull handle and wheels, a molded valance and rubber gasket on both front and rear doors for water resistance, and elastomeric shocks.



Contact your sales representative for more information on pricing, sizes, accessories, and customization options

# SHOCK RACK SIZE OPTIONS

All Racks	Rack Height U Size			Rack Length/Depth		19 Rack Width		Lid I.D. Front/Back		Length O.D.		Width O.D.		Height O.D.		Product Weight		Shock Absorbers
	Model #	U	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lb	kg
3RR-3U20-22B	3	5.25	133	20	508	18.31	465	2	51	32.3	819	23.9	607	11	279	44.4	20.1	Y
3RS-3U20-22B	3	5.25	133	20	508	18.31	465	2	51	32.3	819	23.9	607	11	279	34.5	15.6	Y
3RR-3U24-25B	3	5.25	133	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	11.8	301	57	25.9	Y
3RS-3U24-25B	3	5.5	140	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	11.8	301	46.6	21.1	Y
3RR-3U30-25B	3	5.25	133	30	762	18.31	465	2 / 5	51 / 127	45	1144	23.8	605	11.8	301	50.4	22.9	Y
3RS-3U30-25B	3	5.5	140	30	762	18.31	465	2 / 5	51 / 127	45	1144	28.8	732	11.8	301	50.4	22.9	Y
3RR-4U20-22B	4	7	178	20	508	18.31	465	2	51	32.3	819	23.9	607	13.5	343	TBA	TBA	Y
3RS-4U20-22B	4	7	178	20	508	18.31	465	2	51	32.3	819	23.9	607	13.5	343	TBA	TBA	Y
1SKB-R904U20	4	7	178	20	508	18.31	465	2.25	57	27	686	27.7	702	15.5	394	36	16.3	Y
3SKB-R04U20W	4	7	178	20	508	18.31	465	2.25	57	28.5	724	28	711	16	406	44.3	20.1	Y
3RR-4U24-25B	4	7	178	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	13.5	344	66.8	30.3	Y
3RS-4U24-25B	4	7	178	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	13.5	344	50.6	23	Y
3SKB-R904U24	4	7	178	24	610	18.31	465	4.5	114	36	914	26.8	679	16.3	413	58	26.3	Y
3SKB-R904U28	4	7	178	29.25	743	18.31	465	4.5	114	42	1067	26.8	679	16.3	413	61.5	27.9	Y
3RR-4U30-25B	4	7	178	30	762	18.31	465	2 / 5	51 / 127	45	1144	23.8	605	13.5	344	66.6	30.2	Y
3RS-4U30-25B	4	7	178	30	762	18.31	465	2 / 5	51 / 127	45	1144	23.8	605	13.5	344	53.8	24.4	Y
3SKB-R904U30	4	7	178	30	762	18.31	465	4.5	114	42	1067	26.8	679	16.3	413	60.8	27.6	Y
3RR-5U20-22B	5	8.75	222	20	508	18.31	465	2	51	32.3	819	23.9	607	15.3	389	TBA	TBA	Y
3RS-5U20-22B	5	8.75	222	20	508	18.31	465	2	51	32.3	819	23.9	607	15.3	389	TBA	TBA	Y
3RR-5U24-25B	5	8.75	222	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	15.3	390	66	29.9	Y
3RS-5U24-25B	5	8.75	222	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	15.3	390	50.2	22.8	Y
3RR-5U30-25B	5	8.75	222	30	762	18.31	465	2 / 5	51 / 127	45	1144	23.8	605	15.3	390	68.6	31.1	Y
3RS-5U30-25B	5	8.75	222	30	762	18.31	465	2 / 5	51 / 127	45	1144	23.8	605	15.3	390	55.8	25.3	Y
3RR-6U20-22B	6	10.5	267	20	508	18.31	465	2	51	32.3	819	23.9	607	17.1	433	TBA	TBA	Y
3RS-6U20-22B	6	10.5	267	20	508	18.31	465	2	51	32.3	819	23.9	607	17.1	433	TBA	TBA	Y
1SKB-R906U20	6	10.5	267	20	508	18.31	465	2.25	57	27	686	27.8	705	18.9	479	43.3	19.6	Y
3SKB-R06U20W	6	10.5	267	20	508	18.31	465	2.25	57	28.5	724	28	711	19.5	495	50.7	23	Y
3SKB-R906U24	6	10.5	267	24	610	18.31	465	4.5	114	36	914	26.8	679	20	507	66.6	30.2	Y
3SKB-R906U28	6	10.5	267	29.25	743	18.31	465	4.5	114	42	1067	26.8	679	19.5	495	67.8	30.8	Y
3SKB-R906U30	6	10.5	267	30	762	18.31	465	4.5	114	42	1067	26.8	679	19.5	495	66.8	30.3	Y
3RR-7U20-22B	7	12.25	311	20	508	18.31	465	2	51	32.3	819	23.9	607	18.8	478	TBA	TBA	Y
3RS-7U20-22B	7	12.25	311	20	508	18.31	465	2	51	32.3	819	23.9	607	18.8	478	TBA	TBA	Y
3RR-7U24-25B	7	12.25	311	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	18.8	479	68.6	31.1	Y
3RS-7U24-25B	7	12.25	311	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	18.8	479	55.8	25.3	Y
1SKB-R908U20	8	14	356	20	508	18.31	465	2.25	57	29	737	27.8	705	22.3	565	46.5	21.1	Y
3SKB-R08U20W	8	14	356	20	508	18.31	465	2.25	57	30.5	775	28	711	23	584	56	25.4	Y
3SKB-R908U24	8	14	356	24	610	18.31	465	4.5	114	36	914	26.8	679	23.3	591	74.7	33.9	Y
3SKB-R908U28	8	14	356	29.25	743	18.31	465	4.5	114	42	1067	26.8	679	23.5	597	78.2	35.4	Y
3SKB-R908U30	8	14	356	30	762	18.31	465	4.5	114	42	1067	26.8	679	23.5	597	76.8	34.8	Y
3RR-9U20-22B	9	15.75	400	20	508	18.31	465	2	51	32.3	819	23.9	607	22.3	566	TBA	TBA	Y
3RS-9U20-22B	9	15.75	400	20	508	18.31	465	2	51	32.3	819	23.9	607	22.3	566	TBA	TBA	Y
3RR-9U24-25B	9	15.75	400	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	22.3	567	77	34.9	Y
3RS-9U24-25B	9	15.75	400	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	22.3	567	65.4	29.6	Y
1SKB-R910U20	10	17.5	445	20	508	18.31	465	3.25	83	29	737	27.8	705	26.1	664	54.4	24.7	Y
3SKB-R10U20W	10	17.5	445	20	508	18.31	465	2.25	57	30.5	775	28	711	26.5	673	59	26.8	Y
3SKB-R910U24	10	17.5	445	24	610	18.31	465	4.5	114	36	914	26.8	679	26.8	679	79.9	36.2	Y
3SKB-R910U28	10	17.5	445	29.25	743	18.31	465	4.5	114	42	1067	26.8	679	27.3	692	81.3	36.9	Y
3SKB-R910U30	10	17.5	445	30	762	18.31	465	4.5	114	42	1067	26.8	679	27.3	692	79.9	36.2	Y
3RR-11U20-22B	11	19.25	489	20	508	18.31	465	2	50.8	32.3	819	23.9	607	25.8	655	TBA	TBA	Y
3RS-11U20-22B	11	19.25	489	20	508	18.31	465	2	50.8	32.3	819	23.9	607	25.8	655	TBA	TBA	Y

All Racks	Rack Height U Size			Rack Length/Depth		19 Rack Width		Lid I.D. Front/Back		Length O.D.		Width O.D.		Height O.D.		Product Weight		Shock Absorbers
	Model #	U	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lb	kg
3RR-11U24-25B	11	19.25	489	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	25.8	656	83.2	37.7	Y
3RS-11U24-25B	11	19.25	489	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	25.8	656	70	31.8	Y
1SKB-R912U20	12	21	533	20	508	18.31	465	3.25	83	29	737	27.8	705	26.9	683	57	25.8	Y
3SKB-R12U20W	12	21	533	20	508	18.31	465	2.25	57	30.5	775	28	711	30	762	68	30.8	Y
3SKB-R912U24	12	21	533	24	610	18.31	465	4.5	114	36	914	26.8	679	30.5	773	83.3	37.8	Y
3RR-14U20-22B	14	24.5	622	20	508	18.31	465	2	50.8	32.3	819	23.9	607	30.9	785	TBA	TBA	Y
3RS-14U20-22B	14	24.5	622	20	508	18.31	465	2	50.8	32.3	819	23.9	607	30.9	785	TBA	TBA	Y
1SKB-R914U20	14	24.5	622	20	508	18.31	465	3.25	83	29	737	27.9	708	32.4	822	68.6	31.1	Y
3RR-14U24-25B	14	24.5	622	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	30.9	786	94.8	43	Y
3RS-14U24-25B	14	24.5	622	24	610	18.31	465	2 / 5	51 / 127	39.1	992	23.8	605	30.9	786	71	32.2	Y
3SKB-R914U24	14	24.5	622	24	610	18.31	465	4.5	114	36	914	26.8	679	34	862	94.2	42.7	Y
1SKB-R916U20	16	28	711	20	508	18.31	465	3.25	83	29	737	27.3	692	35.9	911	76	34.5	Y
3SKB-R916U24	16	28	711	24	610	18.31	465	4.5	114	36	914	26.8	679	38	965	102.6	46.5	Y

## NON-SHOCK RACK SIZE OPTIONS

\* Two rack options available: Bottom rack dimensions listed first

All Racks	Rack Height U Size			Rack Length/Depth		19 Rack Width		Lid I.D. Front/Back		Length O.D.		Width O.D.		Height O.D.		Product Weight		Shock Absorbers
	Model #	U	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lb	kg
1SKB-SC191U	1	1.75	44	1	25	18.31	465	N/A	N/A	17.5	445	20.8	527	3.8	95	6.6	3	N
1SKB-SC192U	2	3.5	89	2	51	18.31	465	N/A	N/A	17.5	445	20.8	527	6.5	165	9	4.1	N
1SKB-R2S	2	3.5	89	10.7	272	18.31	465	1.25	32	16.2	411	22.4	569	6.1	156	9.4	4.3	N
1SKB-ISF2U	2	3.5	89	11.25	286	18.31	465	2	51	21.8	552	13.9	352	9	229	15.3	6.9	N
3i-2217M82U	2	3.5	89	12.75	324	18.31	465	N/A	N/A	24.4	619	19.5	495	8.8	222	19.1	8.6	N
1SKB-R2U	2	3.5	89	17.6	447	18.31	465	1.25	32	24	610	22.4	569	5.9	149	10.8	4.9	N
1SKB-R3S	3	5.25	133	10.7	272	18.31	465	1.25	32	16.2	411	22.4	569	7.9	200	10.5	4.8	N
3i-2217M103U	3	5.25	133	12.75	324	18.31	465	N/A	N/A	24.3	616	19.5	495	12.3	311	26.5	12	N
1SKB-R3U	3	5.25	133	17.6	447	18.31	465	1.25	32	24	610	22.4	569	7.6	194	12.3	5.6	N
1SKB-R4S	4	7	178	6	152	18.31	465	1.25	32	16.2	411	22.4	569	9.1	231	11.8	5.4	N
3i-2217M124U	4	7	178	12.75	324	18.31	465	N/A	N/A	24.5	622	19.5	495	14.5	368	28.6	13	N
1SKB-ISF4U	4	7	178	11.25	286	18.31	465	2	51	24	610	18.8	476	12.8	324	22.1	10	N
1SKB-R4U	4	7	178	17.6	447	18.31	465	1.25	32	24	610	22.4	569	9.4	238	14.7	6.7	N
1SKB-R4UW	4	7	178	17.5	445	18.31	465	1.5	38	26.5	673	22.5	572	11.5	292	22.9	10.4	N
1SKB-R6S	6	10.5	267	10.7	272	18.31	465	1.25	32	16.2	411	22.4	569	13.1	333	15.9	7.2	N
3i-2317M146U	6	10.5	267	12.75	324	18.31	465	N/A	N/A	25.8	654	19.5	495	15.5	394	31.2	14	N
1SKB-R6U	6	10.5	267	17.6	447	18.31	465	1.25	32	24	610	22.4	569	13	330	18.4	8.3	N
1SKB-R6UW	6	10.5	267	17.5	445	18.31	465	1.5	38	26.5	673	22.5	572	15	381	25.4	11.5	N
1SKB-R8U	8	14	356	17.6	447	18.31	465	1.25	32	24	610	22.4	569	16.7	424	22.3	10.1	N
1SKB-R8UW	8	14	356	17.5	445	18.31	465	1.5	37	26.8	679	22.5	572	18.5	470	28.6	13	N
1SKB-R100	10	17.5	445	5.25	133	18.31	465	N/A	N/A	23.3	591	22.8	578	11.8	298	16.2	7.3	N
1SKB-R10U	10	17.5	445	17.6	447	18.31	465	1.25	32	24	610	22.4	569	20.3	514	23.8	10.8	N
1SKB-R12U	12	21	533	17.6	447	18.31	465	1.25	32	24	610	22.4	569	23.6	600	29.2	13.2	N
*1SKB-R102	10 / 2	17.5 / 3.5	445 / 89	19.5 / 3.5	495 / 89	18.31	465	N/A	N/A	23.1	587	23.1	587	14.1	359	20	9.1	N
1SKB-R102W	10 / 2	17.5 / 3.5	445 / 89	19.5 / 3.5	495 / 89	18.31	465	N/A	N/A	28	711	23.5	597	14.3	362	20	9.1	N
*1SKB-R104	10 / 4	17.5 / 7	445 / 178	19.5 / 3.5	495 / 89	18.32	465	N/A	N/A	23.9	607	23.3	591	17.8	451	22.7	10.3	N
1SKB-R104W	10 / 4	17.5 / 7	445 / 178	19.5 / 3.5	495 / 89	18.31	465	N/A	N/A	27.8	705	23	584	19.3	489	20	9.1	N
*1SKB-R106	10 / 6	17.5 / 10.5	445 / 267	19.5 / 3.5	495 / 89	18.33	466	N/A	N/A	23.6	600	23	584	21.4	544	25.4	11.5	N
1SKB-R106W	10 / 6	17.5 / 10.5	445 / 267	19.5 / 3.5	495 / 89	18.31	465	N/A	N/A	28	711	23	584	22.8	578	37.6	17	N
*1SKB19-R1208	12 / 8	21 / 14	533 / 356	19.5 / 3.5	495 / 89	18.34	466	N/A	N/A	27.5	699	23.5	597	29.5	749	68.6	31.1	N
*1SKB19-R1406	14 / 6	24.5 / 10.5	622 / 267	19.5 / 3.5	495 / 89	18.35	466	N/A	N/A	32.3	819	24	610	26.1	664	69.5	31.5	N

# INNOVATIVE NON-SHOCK & SPECIALTY RACK CASES

## iSERIES FLY RACKS

Featuring both injection molded cases and racks, these improved waterproof Fly Racks are less than half the weight of standard shock racks and under 62 linear inches—the perfect solution for flying or shipping delicate equipment.



## ROTO RACKS

Roto-molded racks with 19" depth and a molded-in, unbendable valance, and threaded steel rails with self-tapping screws.



## SHALLOW RACKS

10.5" depth shallow racks accommodate a variety of smaller components without having to unplug them to close the back panel.



## NON-SHOCK ROLLING RACKS

Improved rolling rack models offer secure protection with the convenience of sturdy wheels and an easy-to-operate pull handle.



## STUDIO FLYERS

A powerhouse of innovative features in a compact size, injection molded to be lighter, stronger, and more affordable than previous models.



## COMPACT RIGS

The perfect rack mount solution for carrying and protecting smaller pro audio gear and complete rolling transportation systems.



Contact your sales representative for more information on pricing, sizes, accessories, and customization options