



Synergy Global Technology Inc

www.RackmountMart.com

Toll Free: 1-888-865-6888

Tel: 510-226-8368 Fax: 510-226-8968

Email: sales@RackmountMart.com

User Manual 17" / 19" High Brightness LCD 1000 cd/m²



LCDR7U17-04 / LCDR8U19-04 Rackmount Display Panel

Options :

- SDI / MC
- AV / HDMI / Audio
- Touchscreen / DC power
- MIL-type or lockable connector

FC CE

Legal Information

First English printing, October 2002

Information in this document has been carefully checked for accuracy; however, no guarantee is given to the correctness of the contents. The information in this document is subject to change without notice. We are not liable for any injury or loss that results from the use of this equipment.

Safety Instructions

Please read all of these instructions carefully before you use the device. Save this manual for future reference.

- Unplug equipment before cleaning. Don't use liquid or spray detergent; use a moist cloth.
- Keep equipment away from excessive humidity and heat. Preferably, keep it in an air-conditioned environment with temperatures not exceeding 40° Celsius (104° Fahrenheit).
- When installing, place the equipment on a sturdy, level surface to prevent it from accidentally falling and causing damage to other equipment or injury to persons nearby.
- When the equipment is in an open position, do not cover, block or in any way obstruct the gap between it and the power supply. Proper air convection is necessary to keep it from overheating.
- Arrange the equipment's power cord in such a way that others won't trip or fall over it.
- If you are using a power cord that didn't ship with the equipment, ensure that it is rated for the voltage and current labeled on the equipment's electrical ratings label. The voltage rating on the cord should be higher than the one listed on the equipment's ratings label.
- Observe all precautions and warnings attached to the equipment.
- If you don't intend on using the equipment for a long time, disconnect it from the power outlet to prevent being damaged by transient over-voltage.
- Keep all liquids away from the equipment to minimize the risk of accidental spillage. Liquid spilled on to the power supply or on other hardware may cause damage, fire or electrical shock.
- Only qualified service personnel should open the chassis. Opening it yourself could damage the equipment and invalidate its warranty.
- If any part of the equipment becomes damaged or stops functioning, have it checked by qualified service personnel.

What the warranty does not cover

- Any product, on which the serial number has been defaced, modified or removed.
- Damage, deterioration or malfunction resulting from:
 - Accident, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification, or failure to follow instructions supplied with the product.
 - Repair or attempted repair by anyone not authorized by us.
 - Any damage of the product due to shipment.
 - Removal or installation of the product.
 - Causes external to the product, such as electric power fluctuation or failure.
 - Use of supplies or parts not meeting our specifications.
 - Normal wear and tear.
 - Any other causes which does not relate to a product defect.
- Removal, installation, and set-up service charges.

Regulatory Notices Federal Communications Commission (FCC)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

Any changes or modifications made to this equipment may void the user's authority to operate this equipment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-position or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Contents

< Part. 1 > LCDR7U17-04 / LCDR8U19-04

| | | |
|-----|-------------------------------|---------|
| 1.1 | Package Content | P.1 |
| 1.2 | Structure Diagram & Dimension | P.1 - 3 |
| 1.3 | Installation | P.4 |

< Part. 2 > Specifications / OSD / Remote Controller

| | | |
|-----|-------------------------------------|---------|
| 2.1 | Product Specifications | P.5 - 6 |
| 2.2 | On-screen Display Operation (OSD) | P.7 - 8 |

< Part. 3 > Options

| | | |
|-----|---|------|
| 3.1 | 3G / HD / SD- SDI Broadcast-grade input (except RP-H717) | P.9 |
| 3.2 | MC Multi-display control solution | P.10 |
| 3.3 | Ver.2.2D Upgrade : DVI-D + VGA + BNC + S-Video + Audio | P.11 |
| 3.4 | Ver.2.2H Upgrade : HDMI + VGA + BNC + S-Video + Audio | P.11 |
| 3.5 | 17" / 19" Touchscreen : Resistive, Capacitive | P.12 |
| 3.6 | 48V, 24V or 12VDC power | P.13 |
| 3.7 | MIL-type or lockable connector | P.14 |

Before Installation

- It is very important to mount the equipment in a suitable cabinet or on a stable surface.
- Make sure the place has a good ventilation, is out of direct sunlight, away from sources of excessive dust, dirt, heat, water, moisture and vibration.

Unpacking

The equipment comes with the standard parts shown in package content. Check and make sure they are included and in good condition. If anything is missing, or damaged, contact the supplier immediately.

How To Clean Your LCD Monitor



Caution :

- To avoid the risk of electric shock, make sure your hands are dry before unplugging your monitor from or plugging your monitor into an electrical outlet.
- When you clean your monitor, do not press down on the LCD screen. Pressing down on the screen can scratch or damage your display. Pressure damage is not covered under warranty.
- Use only cleansers made specifically for cleaning monitors and monitor screens. Cleansers not made to clean monitors and monitor screens can scratch the LCD display or strip off the finish.
- Do not spray any kind of liquid directly onto the screen or case of your monitor. Spraying liquids directly onto the screen or case can cause damage which is not covered under warranty.
- Do not use paper towels or abrasive pads to clean your monitor. Using an abrasive pad or any wood based paper product such as paper towels can scratch your LCD screen.

Cleaning Your Monitor

To clean your LCD safely, please follow these steps :

- ① Disconnect the power cord.
- ② Gently wipe the surface using a clean, dry microfiber cloth. Use as little pressure as possible.

Cleaning Tough Marks and Smudges

To remove tough marks and smudges, please follow these steps :

- ① Disconnect the power cord.
- ② Spray a small amount of non-abrasive cleanser on a microfiber cloth.



Caution : Do not spray or apply any liquids directly onto the monitor. Always apply the solution to your microfiber cloth first, not directly on the parts you are cleaning.

- ③ Gently wipe the surface. Use as little pressure as possible.
- ④ Wait until your monitor is completely dry before plugging it in and powering it up.

< Part 1 >


< 1.1 > Package Content




- LCDR7U17-04 or Lcdr8U19-04 X 1
- 6ft VGA cable X 1
- Power adapter X 1
- Power cord X 1


< 1.2 > Structure Diagram


Front view

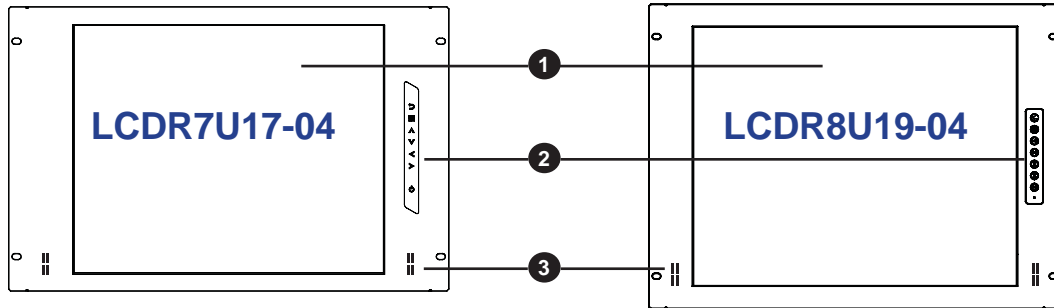

Rear view

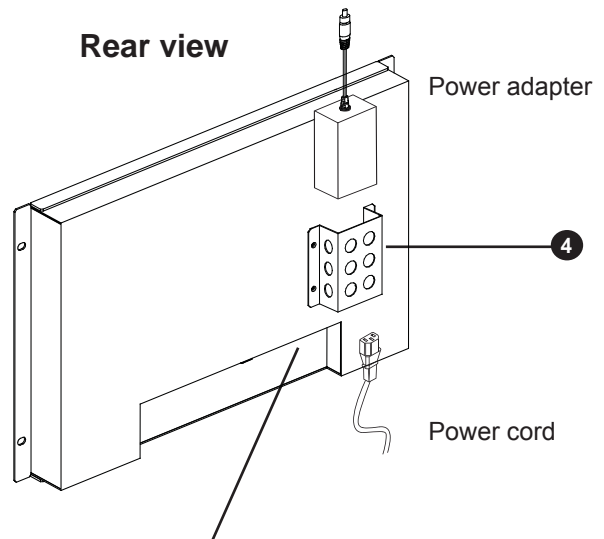


- ① LCD panel
- ② LCD membrane 
- ③ Audio speaker
- ④ Power adapter basket




- Standard** : DVI-D + VGA
- Ver.2.2D upgrade** : DVI-D + VGA + BNC + S-Video + audio
- Ver.2.2H upgrade** : HDMI + VGA + BNC + S-Video + audio
- Option** : SDI, USB for touchscreen & DC power

< 1.2 > Dimension - LCDR7U17-04


Front View

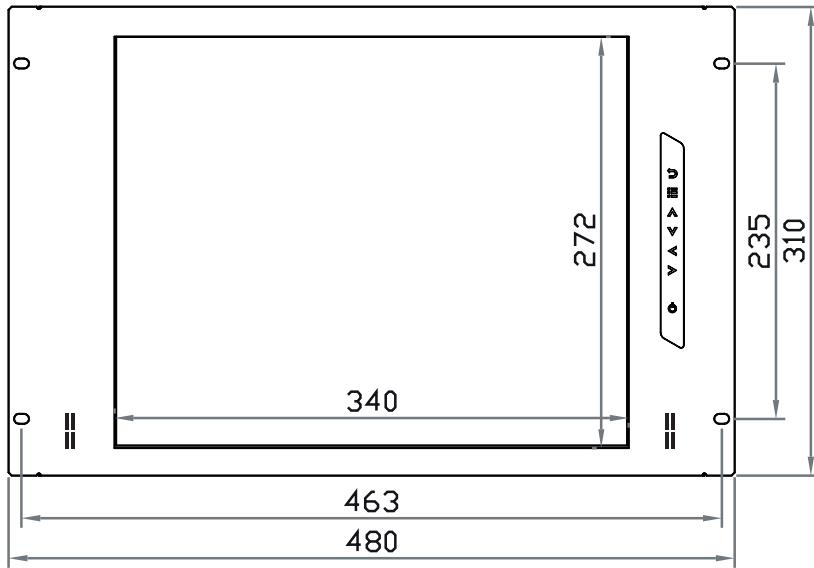

Side View

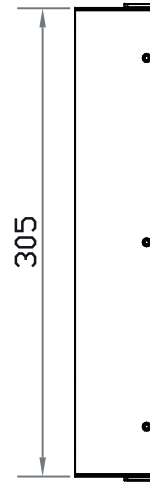

Bottom View

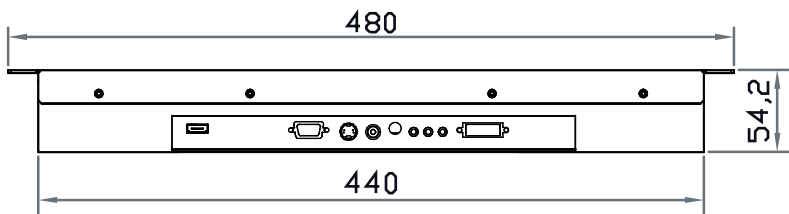


UNIT : mm
1mm = 0.03937 inch

| Model | Product Dimension (W x D x H) | Net Weight |
|-------------|---|----------------|
| LCDR7U17-04 | 480 x 54.2 x 310 mm 18.9 x 2.1 x 12.2 inch | 6 kg 13 lbs |

< 1.2 > Dimension - Lcdr8U19-04


Front View

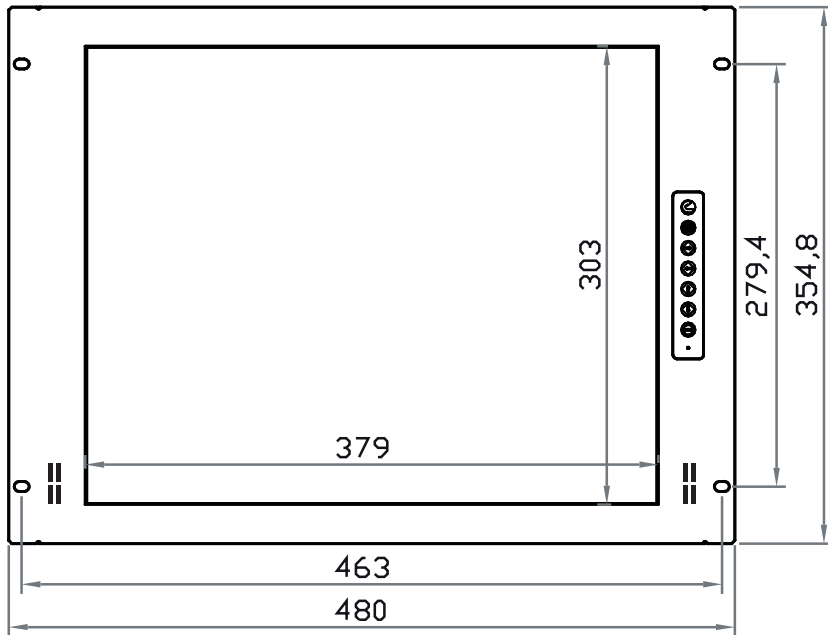

Side View




Bottom View

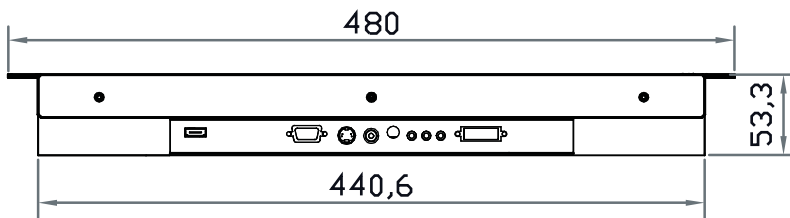

UNIT : mm
1mm = 0.03937 inch


| Model | Product Dimension (W x D x H) | Net Weight |
|-------------|---|------------------|
| LCDR8U19-04 | 480 x 53.3 x 354.8 mm 18.9 x 2.1 x 14 inch | 6.5 kg 14 lbs |

< 1.3 > Installation

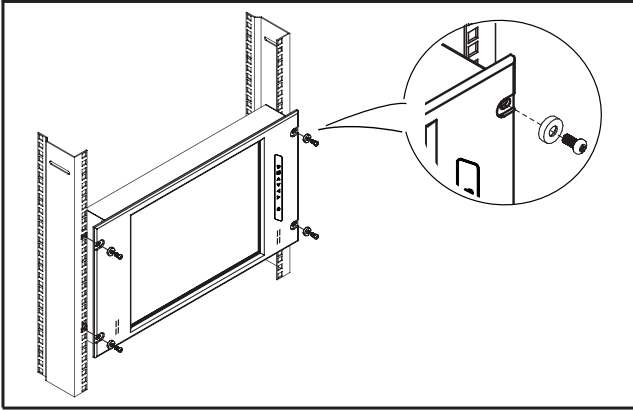

Step 1

- Mount the display panel with M6 screw set.
 - M6 screw x 4 pcs required (Left & right side).
- M6 screw sets are not provided.**

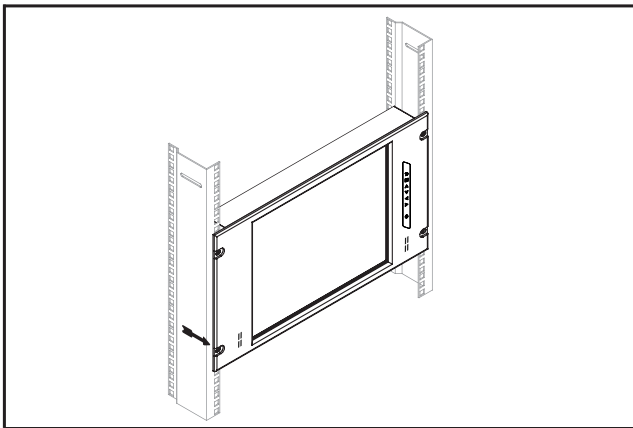

Step 2

- Fix the LCD into the rack.

< Part 2 >

< 2.1 > Product Specifications

| LCD Panel | | LCDR7U17-04 | LCDR8U19-04 |
|-----------|--------------------------------|-----------------------|------------------------|
| | Panel Size (diagonal) | 17-inch TFT color LCD | 19-inch TFT color LCD |
| | Display pixel (dots x lines) | 1280 x 1024 | 1280 x 1024 |
| | Brightness (typ.) | 1000 | 1000 |
| | Contrast Ratio (typ.) | 1000:1 | 1000:1 |
| | Color | 16.7 M | 16.7 M |
| | Viewing Angle (L/R/U/D) | 85/85/80/80 | 80/80/80/80 |
| | Response Time (ms) | 5 | 5 |
| | Dot pitch (mm) | 0.264 | 0.294 |
| | Display Area (mm) | 337.92H x 270.33V | 376.32H x 301.05V |
| | Surface treatment | Anti-glare | Haze 25%, Hard-coating |
| | Surface hardness | 3H | 3H |
| | Backlight Type | LED | LED |
| | MTBF (hrs) | 50,000 | 50,000 |

| Video Connectivity | Digital | HDMI | HDMI 1.1, CEA-861-D |
|--------------------|-----------------|-------------------|---------------------------|
| | | DVI | DVI-D, TMDS single link |
| | Analog | VGA | Analog 0.7Vp-p |
| | | Composite (BNC) | NTSC & PAL |
| | | S-Video (4-pin) | NTSC & PAL |
| | Plug & Play | DVI / VGA | VESA EDID structure 1.3 |
| | Synchronization | VGA | Separate, Composite & SOG |

| Audio Connectivity | Audio Input | Connector | 3.5mm stereo jack |
|--------------------|----------------|--------------------------|-------------------|
| | | Impedance / Power level | 30kΩ / 750mV |
| | Audio Output | Connector | 3.5mm stereo jack |
| | | Resistance / Power level | 30kΩ / 2.8V |
| | Speaker Output | Power | 2 x 2W |

*When the audio output is connected, speaker output is OFF

| Power | Power Supply | Range | Auto-sensing 100 to 240VAC, 50 / 60Hz |
|-------|-------------------|-------------------|---------------------------------------|
| | Power Consumption | Screen display ON | 35W or less |
| | | Power saving mode | 4W or less |
| | | Power button OFF | 1W or less |

| Regulatory | Safety Approval | FCC & CE |
|------------|-----------------|----------|
|------------|-----------------|----------|

| | | | |
|---------------------------------|-----------|-------------|----------------------------------|
| Environmental Conditions | Operating | Temperature | 0 to 50°C degree |
| | | Humidity | 20~90%, non-condensing |
| | Storage | Temperature | -5 to 60°C degree |
| | | Humidity | 5~90%, non-condensing |
| | | Shock | 10G acceleration (11ms duration) |
| | | Vibration | 5~500Hz 1G RMS random |


| | | | |
|-------------------------------|-----------------------|---|---|
| Physical Specification | | LCDR7U17-04 | LCDR8U19-04 |
| | Product (W x D x H) | 480 x 54.2 x 310 mm 18.9 x 2.1 x 12.2 inch | 480 x 53.3 x 354.8 mm 18.9 x 2.1 x 14 inch |
| | Net Weight | 6 kgs / 13 lbs | 6.5 kgs / 14 lbs |

| | | | |
|--------------------------|-------------------|-----------|-----------------------------|
| Applicable Format | DVI-D / VGA Input | PC Signal | 1280 x 1024 x 60 / 75Hz |
| | | | 1280 x 960 x 60Hz |
| | | | 1280 x 760 x 60 / 75Hz |
| | | | 1152 x 864 x 75Hz |
| | | | 1024 x 768 x 60 / 70 / 75Hz |
| | | | 848 x 480 x 60Hz |
| | | | 800 x 600 x 60 / 72 / 75Hz |
| | | | 720 x 400 x 70Hz |
| | | | 640 x 480 x 60 / 72 / 75Hz |
| | | | 640 x 400 x 70Hz |
| 640 x 350 x 70Hz | | | |

< 2.2 > On-screen Display Operation (OSD)


LCDR8U19-04

- Power light
- Green = On
- Orange = Power saving



| Membrane Switch | Function |
|-----------------|--|
| | Power on / off LCD |
| | Display the OSD menu |
| | Scrolls through menu options and adjusts the displayed control (To auto adjustment by pressing the button for 5 seconds) |
| | Exit the OSD screen Toggle analog, digital & video connection (DVI-D and video options only) |

LCDR7U17-04




| Membrane Switch | Function |
|-----------------|--|
| | Turn the monitor on or off |
| | Display the OSD menu Act as an Enter key to select screen setting options |
| | Scroll through menu options and adjust the displayed control |
| | Exit the OSD screen Go back to the previous on-screen sub-menu or main menu |

Remark : All LED touch buttons in **WHITE** light.

The LED of **Power** touch button will flash continuously when there is no signal input.

- ① All the LED touch buttons will automatically turn off after 10 minutes of idle status (except the **Power**).
- ② Light up all membrane buttons, please press any button for 1 - 2 seconds (except the **Power**).

< 2.2 > On-screen Display Operation (OSD)

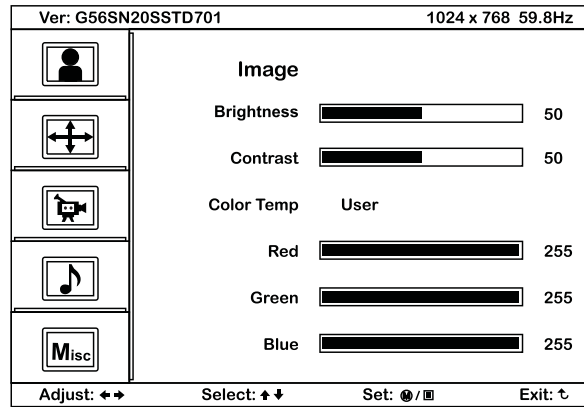


OSD Configuration Page



Image:

for the brightness, contrast, color temp, red, green, and blue



Geometry:

for the auto adjust, H position, V position, phase and clock



Video:

for the colour, tint, sharpness, noise reduction, DCDi and TV Setup



Audio:

for volume, bass, treble, balance, AVL and mute



Misc:

for the language, OSD position, graphic mode, ratio, reset and timer

< Part 3 >


< 3.1 > Options : 3G / HD / SD-SDI input



Our SDI input is an ideal solution for the broadcast-grade video and high resolution CCTV market.

Designed for use with Full HD 1080p and ultra high resolution 1920 x 1200 LCD displays, we provide a SDI input module without using additional space or power.

SDI

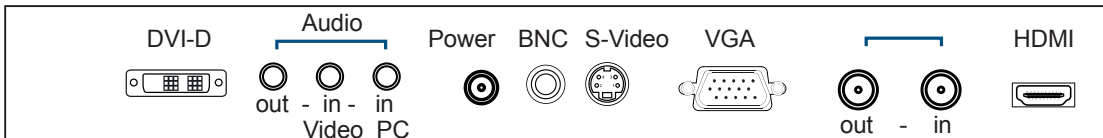

*** For **SDI** option, the AD board will be upgraded to Ver.3.0, and this comes standard with HDMI, DVI-D, VGA, S-Video, BNC and audio inputs.

| | | |
|--------------|------------|--|
| INPUT | 3G-SDI IN | BNC x 1 / 0.8Vp-p (75 ohm) |
| | 3G-SDI OUT | BNC x 1 / Active through, equalized & relocked |

| | | |
|----------------------------|-------|---|
| Standard Compliance | Video | SMPTE 425M / 274M / 296M / 125M ITU-R BT.656 |
| | Audio | SMPTE 299M / 272M-C |

| | | |
|--------------------------------|--------------|--|
| Compatible Video Format | 3G-SDI | 1080p @60 / 50Hz, 4:2:2 1080p @30 / 25 / 24Hz, 4:4:4 1080i @60 / 50Hz, 4:4:4 720p @60 / 50Hz, 4:4:4 |
| | HD-SDI | 1080p @30 / 25 / 24Hz, 4:2:2 1080i @60 / 50Hz, 4:2:2 720p @60 / 50Hz, 4:2:2 |
| | SD-SDI | 480i @60Hz, 4:2:2 |
| | ITU-R BT.656 | 576i @50Hz, 4:2:2 |

| | | |
|--------------------------------|--------|---|
| Compatible Audio Format | 3G-SDI | 48kHz, 16 / 20 / 24 bit, 2 CH, Synchronized Video |
| | HD-SDI | 48kHz, 16 / 20 / 24 bit, 2 CH, Synchronized Video |
| | SD-SDI | 48kHz, 16 / 20 / 24 bit, 2 CH, Synchronized / Asynchronized Video |

| | | |
|--|--------|-------------------|
| Max. Transmission Distance 75 ohm coaxial cable | 3G-SDI | 150m at 2.97Gb/s |
| | HD-SDI | 250m at 1.485Gb/s |
| | SD-SDI | 480m at 270Mb/s |


< 3.2 > Options : MC (Multi-display Control)



More control is always good. Especially when it is necessary and easy. Synergy Global Technology provides MC solution to control the OSD of various Industrial LCD displays up to 64 units.


The RS-232C is used for the communication between the PC and the first display via a 15 feet serial cable while the CAN bus is used for the various LCD displays cascade together via CAT 5/6 cable, and daisy chain up to 1,000 meters.

Designed for use with our Industrial LCD displays, we provide a MC input module without using additional space or power.

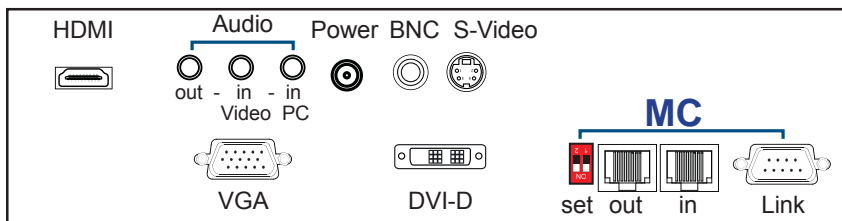

*** Please download the protocol of MC control at :
http://www.rackmountmart.com/dataSheet/SGTI-Multi-Display_Spec_20703.pdf

*** For MC option, casing depth will be changed.

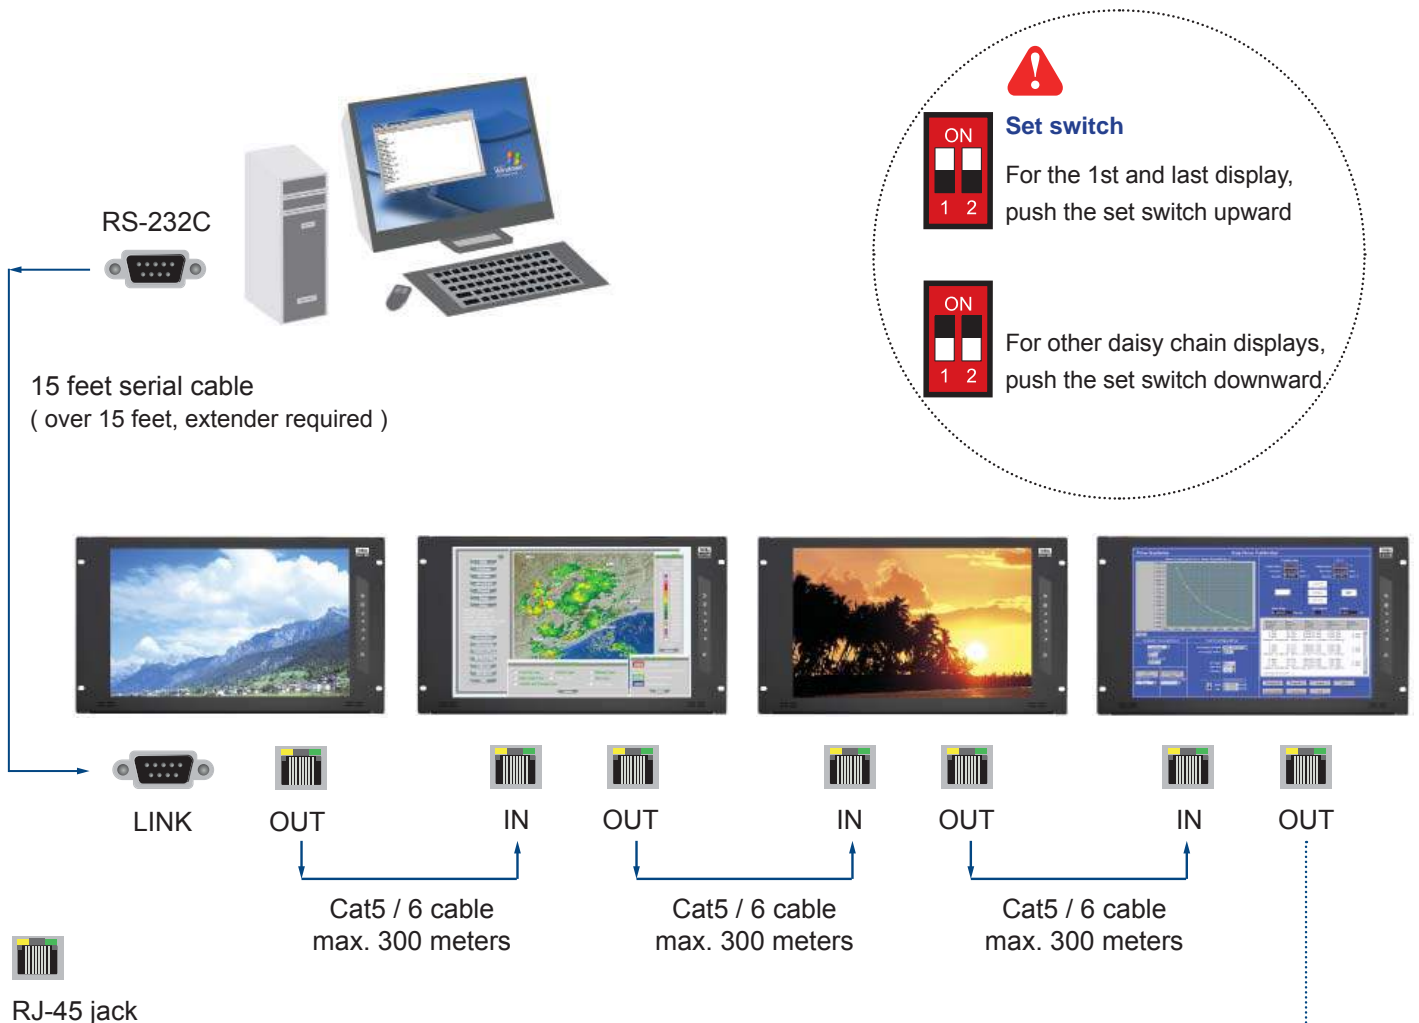


Daisy chain up to 1,000 meters and 64 displays

up to 64 displays


< 3.3 > Ver.2.2D Upgrade Options :

- **DVI-D** (DVI-D TMDS single link)
- **AV** (S-Video + Composite, BNC)
- **Audio** (3.5mm audio jacks for audio in & out, and 2W + 2W speakers)

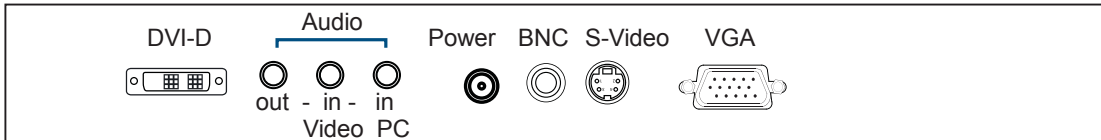

< 3.4 > Ver.2.2H Upgrade Options :

- **HDMI** (HDMI 1.1, CEA-861-D)
- **AV** (S-Video + Composite, BNC)
- **Audio** (3.5mm audio jacks for audio in & out, and 2W + 2W speakers)

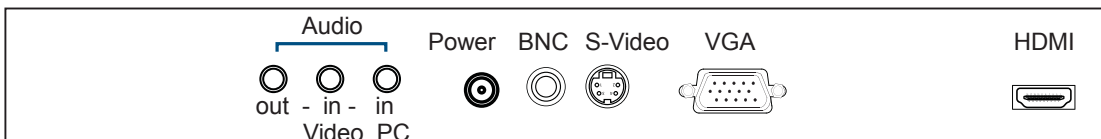


< 3.5 > Options : Touchscreen & driver

17" / 19" USB Touchscreen Specification

| Model | 17" | | 19" | |
|-----------------------|-------------------------------|-------------|-------------------------------|-------------|
| | TRB | Resistive | TCB | Capacitive |
| Technology | 5-Wire Resistive | | Capacitive | |
| Touch Point | Single | | Single | |
| Method | Stylus or Finger | | Finger | |
| Activation Force | ≤ 50g / Stylus=R0.8 | | ≤ 50g | |
| Durability | 35 million touches | | 300 million touches | |
| Response Time | 15 ms | | 20 ms | |
| Optical Transmittance | 80% ± 3% | | 93% ±2% | |
| Surface Hardness | 3H | | 9H | |
| Haze | 8% ± 3% | | 7% | |
| Glass | 1.4 ±0.2 mm | 3.2 ±0.2 mm | 2.8 mm ±10% | 2.8 mm ±10% |
| Connector | USB Type A | | USB Type A | |
| Compatibility | Windows 7 / XP / Vista, Linux | | Windows 7 / XP / Vista, Linux | |

- USB touchscreen package includes 1 x 6ft USB cable, quick reference guideline and CD disc
- For detailed information, please refer to the attached CD disc
- As the touchscreen unit is not made of toughened glass, please handle it carefully

USB Touchscreen

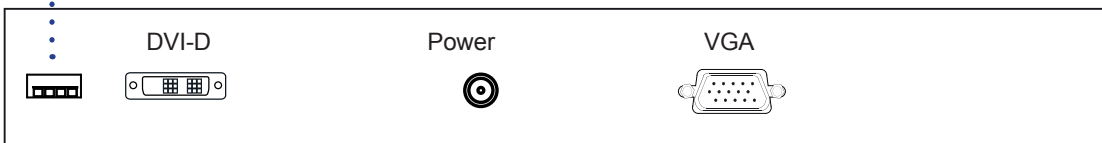

Please follow the below steps to setup the touch screen:-

Step 1. Run the bundled CD disc or download the driver from the link below :

<http://www.rackmountmart.com/downloads.html>


Step 2. Double click the Setup.exe

Step 3. Follow the installation instruction to finish the setup


Step 4. After installation, run the TouchKit program & the "4 point calibration"



Please do the initial calibration after the first setup

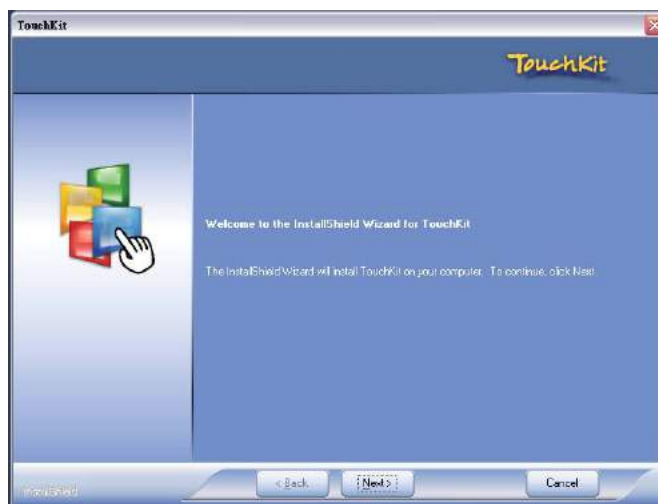



< 3.6 > Options : DC Power





| Model | 24V | 48V |
|----------------------|----------|----------|
| Input rating | | |
| Input voltage: | 24-Volt | 48-Volt |
| Input range: | 18 ~ 36V | 36 ~ 75V |
| Input current | | |
| - No load | 50 mA | 50 mA |
| - Full load | 4880 mA | 2442 mA |
| Output rating | | |
| Output voltage: | 12-Volt | 12-Volt |
| Output current: | 8.3A | 8.3A |
| Efficiency | 85% | 86% |

< 3.7 > Options : MIL-type or Lockable Connector

| | Input | Part no. | MIL Standard |
|-----------------------------|--------------------------|--|-------------------|
| MIL - type Connector | DC Power *** (Male) | -MD (MS3470W8-33P)  | MIL - DTL - 26482 |
| | VGA *** (Male) | -MA (MS3470W14-15P)  | MIL - DTL - 26482 |

*** There are several additional MIL DC and VGA connector types with varying design characteristics to meet cost considerations and to provide users with the most design flexibility possible. For more information, please contact us.

| | Input | Part no. | Standard |
|---------------------------|----------------------|--|------------|
| Lockable Connector | DC Power (Male) | -LD  | D-type 3W3 |
| | USB | -LS  | |

*** MIL - type or Lockable connectors above can be integrated with our LCD displays. Sale service just for connectors not provided.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

All brand names, logo and registered trademarks are properties of their respective owners.

Copyright 2012 Synergy Global Technology Inc. All rights reserved.