



Toll : 1-888-865-6888

Tel : 510-226-8368

Fax : 510-226-8968

Sales@RackmountMart.com



LCD1U19-05

1U rack mount 19" TFT console -PS2 Version


LCD1U19-05 provides industrial level input solution to optimize your space utilization by controlling your system in just 1U rack space.

Features

- Dual Rails for independent Panel and Keyboard tray
- Hidden handle for Keyboard tray
- Support Sun native resolution
- Support 15 various keyboard languages
- Bright Active Matrix TFT Display
- OSD function (On Screen Display) for LCD display
- Durable keyboards (touchpad or trackball)
- Panel protected by tempered glass
- Audio Function (optional)
- DC power (optional)



Dimension and diagram

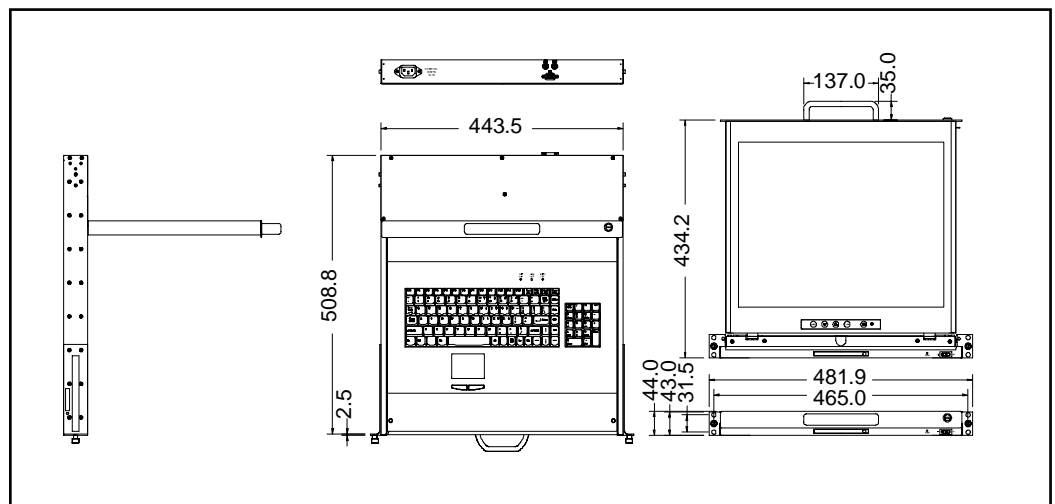

LCD1U19-05

1U rack mount 19" TFT console

Specification



Model Name	LCD1U19-05
Number of ports	1
Dimension	448.5x509.8x44mm/17.7x20.0x1.7in
Package Dimension	565x660x220mm/22.2x26.0x8.7in
Net Weight	12.0Kg / 26.5Lb
Gross Weight	17.0Kg / 37.5Lb
Display Size	19"
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1280X1024 (SXGA)
Pixel Pitch	Supports 0.098mm x0.294mm
Viewing Angle (CR>10)	Right-Left view 140° (Typ) Up-Down View 140° (Typ)
Contrast Ratio	500:1
Brightness	White 250cd/m2 (Center 1 point Typ)
Back Light	Four Lamps for Back Light
Supported Colors	16.2M Colors (6-bit with FRC)
Response Time	Rising Time 2ms, Decay Time 10ms
Operating System	Dos, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2, SUN and USB
System Cables	VGA+2xPS/2 cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45~80KHZ
Power Source	100-240 VAC input
Power Consumption	25W, 21.05W for Panel
Temperature	Operate 0° ~ 50° C / 32° ~ 122° F Storage-20° ~ 60° C / -4° ~ 140° F
Humidity	10%~90%RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	USA, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japan, Taiwan
Certification	CE/FCC, UL/CUL/C-Tick

Ordering Optional

Color (Black / Beige / OEM color)
Cherry keyboard with trackball (PS/2 only)
Touch screen (USB or RS232)
DC power (-48V~+48V / +- 12V)
USB type keyboard / mouse
Anti-glare protective glass
Additional SUN function key
Rear bracket extension up to 1030mm
Detachable keyboard plate
Signal cable 1.8m / 3.0m / 5.0m (6 ft/10 ft/15 ft)
Audio function
DVI interface



LCD1U19-05-8kvm

1U rack mount 19" TFT console with 8 ports KVM Switch


LCD1U19-05-8kvm provides industrial level input solution to optimize your space utilization by controlling your system in just 1U rack space. You can control 8 platforms by using built-in KVM switch and easily expand the connections up to 8 levels with the combination of KVM switch boxes.

Features

- Dual Rails for independent Panel and Keyboard tray
- Hidden handle for Keyboard tray
- Support Sun native resolution
- Support 15 various keyboard languages
- Bright Active Matrix TFT Display
- OSD function (On Screen Display) for LCD display
- Durable keyboards (touchpad or trackball)
- Panel protected by tempered glass
- Audio Function (optional)
- DC power (optional)



Dimension and diagram

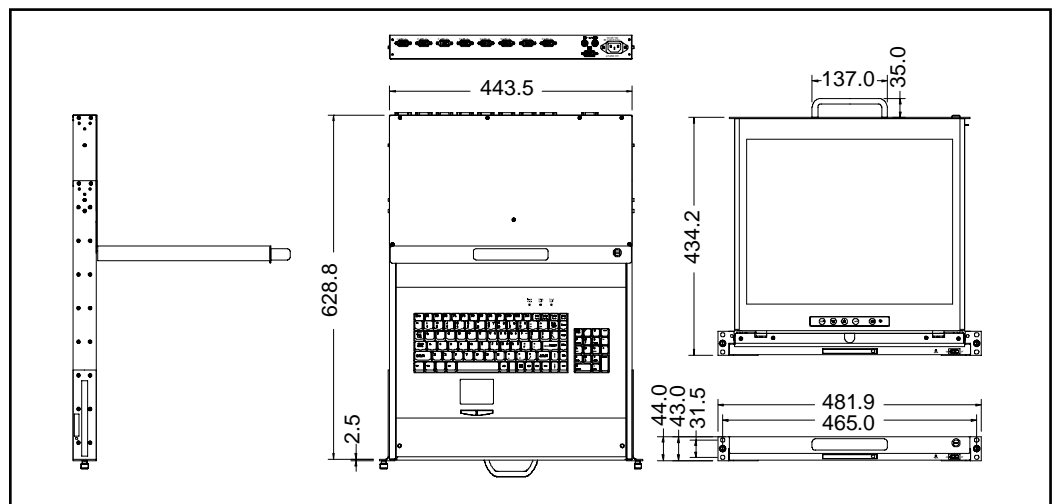

LCD1U19-05-8kvm

1U rack mount 19" TFT console with 8 ports KVM

Specification



Model Name	LCD1U19-05-8kvm
Number of ports	8
Dimension	448.5x629.8x44mm/17.7x24.8x1.7in
Package Dimension	555x725x210mm/21.9x28.5x8.3in
Net Weight	13.0Kg / 28.7Lb
Gross Weight	18.0Kg / 39.7Lb
Display Size	19"
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1280X1024 (SXGA)
Pixel Pitch	Supports 0.098mm x0.294mm
Viewing Angle (CR>10)	Right-Left view 140° (Typ) Up-Down View 140° (Typ)
Contrast Ratio	500:1
Brightness	White 250cd/m2 (Center 1 point Typ)
Back Light	Four Lamps for Back Light
Supported Colors	16.2M Colors (6-bit with FRC)
Response Time	Rising Time 2ms, Decay Time 10ms
Operating System	Dos, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2, SUN and USB
System Cables	VGA+2xPS/2 cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45~80KHZ
Power Source	100-240 VAC input
Power Consumption	25W, 21.05W for Panel
Temperature	Operate 0° ~ 50° C / 32° ~ 122° F Storage-20° ~ 60° C / -4° ~ 140° F
Humidity	10%~90%RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	USA, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japan, Taiwan
Certification	CE/FCC, UL/CUL/C-Tick

Ordering Optional

Color (Black / Beige / OEM color)
Cherry keyboard with trackball (PS/2 only)
DC power (-48V~+48V / +- 12V)
USB type keyboard / mouse
Anti-glare protective glass
Additional SUN function key
Rear bracket extension up to 1030mm
Detachable keyboard plate
Signal cable 1.8m / 3.0m / 5.0m (6 ft/10 ft/15 ft)
Audio function
DVI interface



LCD1U19-05-16kvm

1U rack mount 19" TFT console with 16 ports KVM Switch


LCD1U19-05-16kvm provide industrial level input solution to optimize your space utilization by controlling your system in just 1U rack space. You can control 16 platforms by using built-in KVM switch and easily expand the connections up to 8 levels with the combination of KVM switch boxes.

Features

- Dual Rails for independent Panel and Keyboard tray
- Hidden handle for Keyboard tray
- Support Sun native resolution
- Support 15 various keyboard languages
- Bright Active Matrix TFT Display
- OSD function (On Screen Display) for LCD display
- Durable keyboards (touchpad or trackball)
- Panel protected by tempered glass
- Audio Function (optional)
- DC power (optional)



Dimension and diagram

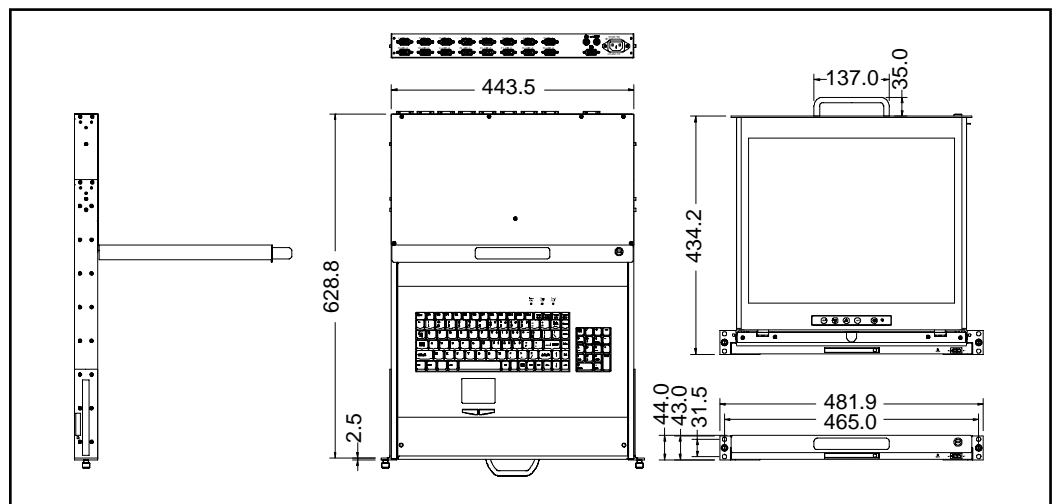

LCD1U19-05-16kvm

1U rack mount 19" TFT console with 16 ports KVM

Specification



Model Name	LCD1U19-05-16kvm
Number of ports	16
Dimension	448.5x629.8x44mm/17.7x24.8x1.7in
Package Dimension	555x725x210mm/21.9x28.5x8.3in
Net Weight	13.0Kg / 28.7Lb
Gross Weight	18.0Kg / 39.7Lb
Display Size	19"
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1280X1024 (SXGA)
Pixel Pitch	Supports 0.098mm x0.294mm
Viewing Angle (CR>10)	Right-Left view 140° (Typ) Up-Down View 140° (Typ)
Contrast Ratio	500:1
Brightness	White 250cd/m2 (Center 1 point Typ)
Back Light	Four Lamps for Back Light
Supported Colors	16.2M Colors (6-bit with FRC)
Response Time	Rising Time 2ms , Decay Time 10ms
Operating System	Dos, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2, SUN and USB
System Cables	VGA+2xPS/2 cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45~80KHZ
Power Source	100-240 VAC input
Power Consumption	25W, 21.05W for Panel
Temperature	Operate 0° ~ 50° C / 32° ~ 122° F Storage-20° ~ 60° C / -4° ~ 140° F
Humidity	10%~90%RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	USA, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japan, Taiwan
Certification	CE/FCC, UL/CUL/C-Tick

Ordering Optional

Color (Black / Beige / OEM color)
Cherry keyboard with trackball (PS/2 only)
DC power (-48V~+48V / +- 12V)
USB type keyboard / mouse
Anti-glare protective glass
Additional SUN function key
Rear bracket extension up to 1030mm
Detachable keyboard plate
Signal cable 1.8m / 3.0m / 5.0m (6 ft/10 ft/15 ft)
Audio function
DVI interface